

Customer:


Product Model:

Customer Approve By:

REV.

DESCRIPTION OF MODIFY

DATE

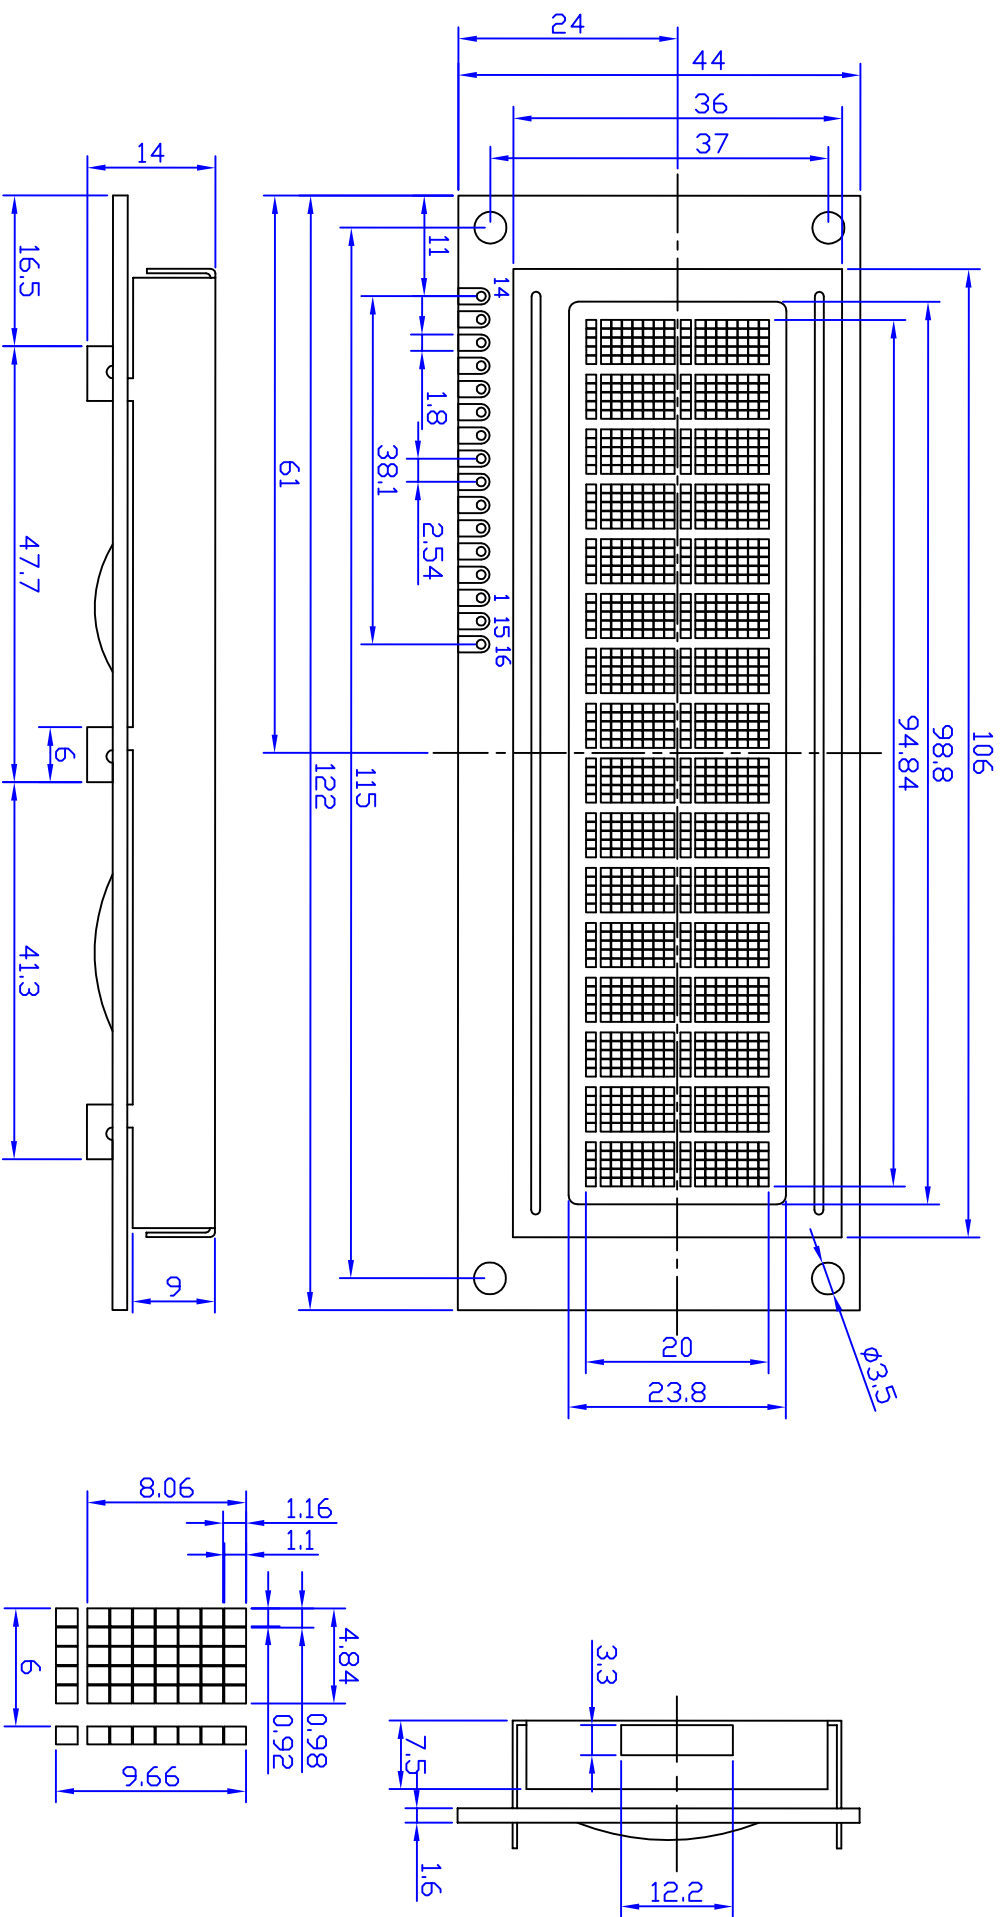

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----|---|-----|---|----|---|----|---|----|---|---|---|----|---|----|---|----|---|----|----|----|----|----|----|----|----|----|----|---|----|---|----|
| VSS | 1 | Vdd | 2 | V0 | 3 | RS | 4 | RW | 5 | E | 6 | D0 | 7 | D1 | 8 | D2 | 9 | D3 | 10 | D4 | 11 | D5 | 12 | D6 | 13 | D7 | 14 | A | 15 | K | 16 |
|-----|---|-----|---|----|---|----|---|----|---|---|---|----|---|----|---|----|---|----|----|----|----|----|----|----|----|----|----|---|----|---|----|

digital vision



UNITS: MM

TITL

REV:

SIZE:

Part Number: DC1602B

SHEET:

SCALE:

- NOTE:
1. Display mode: STN Y/G, Transflective Positive ;
 2. Drive method: 1/16 Duty, 1/4 Bias, Vop=4.3V;
 3. Viewing direction: 6:00;
 4. Op. Temp: -20---+70;
 5. Storage Temp: -30---+80;
 6. LED Back light.
 7. Connection: ZEBRA