


DG12232B-5

122x32 1/32
Duty, 1/6 Bias


1. External Dimension

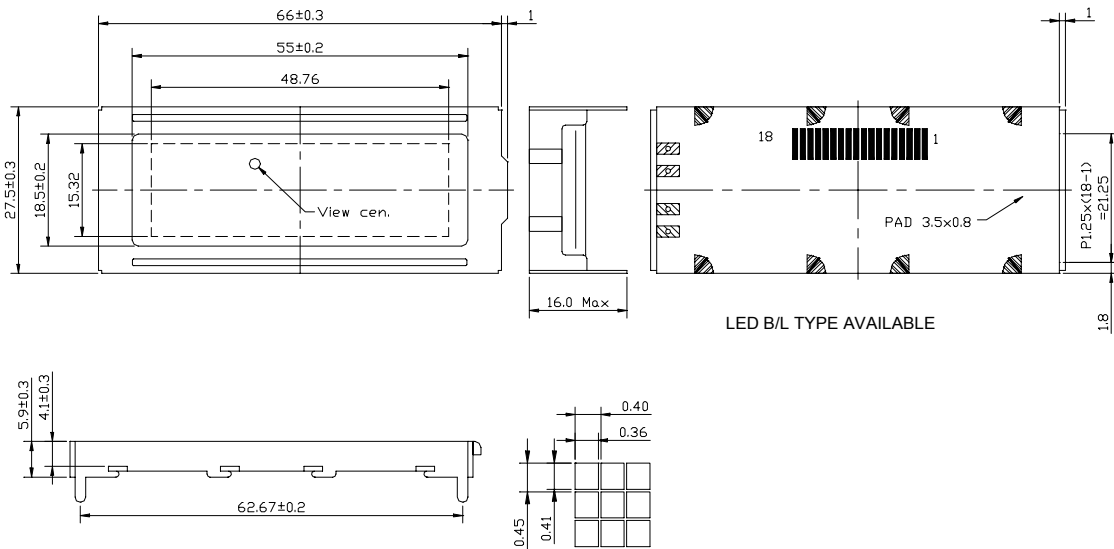

2. Pin Table

1	2	3	4	5	6	7	8	9	16	17	18
Vdd	Vss	V0	RST	E/L	E/R	R/W	A0	DB0	DB7	NC	NC

3. Block Diagram

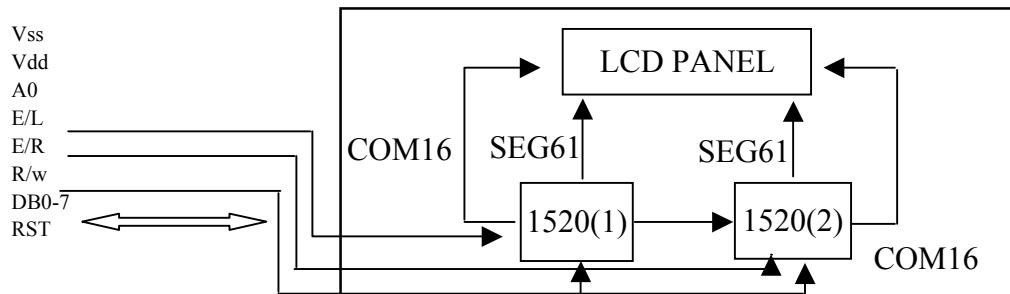

4. Electrical Characteristics (Ta=25°C, Vdd=5.0V±0.25V)

Item	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input High Voltage	Vih	-	0.8Vdd		Vdd	V
Input Low Voltage	Vil	-	0		0.2Vdd	V
Output High Voltage	Voh	-I OH=0.2mA	2.4			V
Output Low Voltage	Vol	I ol=1.2mA			0.4	V
Supply Current	Idd	Vdd=5.0V		1.47		mA
Operating Voltage for LCD	Vdd-V0	STN		5		V
		TN		5		V